


Model 508 Process Analyzer

The Guided Wave Model 508 Process Analyzer is a multi-channel, fiber optic, UV-VIS spectrophotometer system designed for use in process environments. Configurable with up to 4 channels, the Model 508 comes in a NEMA 4 enclosure with built-in thermal control to enable the most consistent performance possible while in 24/7 service mode. Up to 16 parameters may be monitored on each channel making it suitable for many applications in chemical and polymer plants, refining and petrochemical, pharmaceuticals and other specialty chemicals, paints and varnishes, adhesives, wastewater management, biotech, etc. It has a built-in computer control unit with touch screen for convenient user interfacing to the Windows™ operating software.

Reliable, Rugged, and Flexible

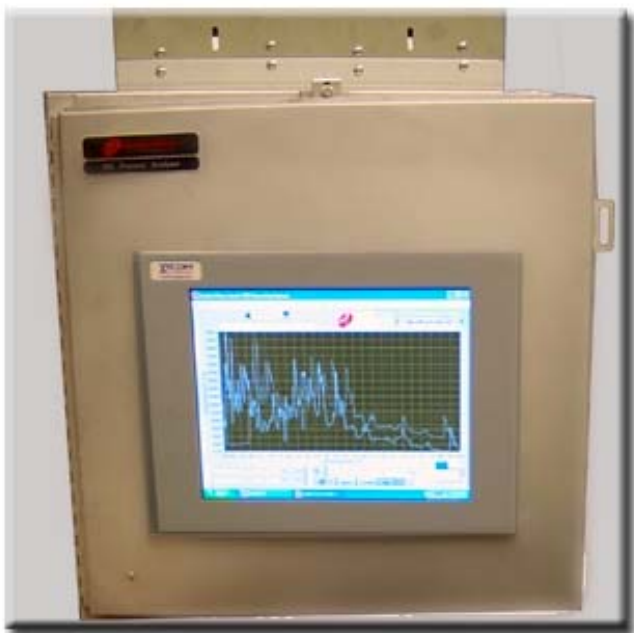

By partnering with Guided Wave you gain the advantage of 20+ years focusing on the on-line analytical needs of the chemical processing industry. Our entire product line is designed and developed to meet the challenges of the production environment. We favor modular, units exemplified by the 508's "snap tight" installation dock. The Xenon source lamps can last for years.

Features

- Rapid data collection with *enhanced* diode array miniaturized optical bench
- Built-in Instrument Control Unit (PC) with touch screen and Windows™ XP
- Analyzer control program developed in LabVIEW™ featuring customizable settings & trending capability
- Modbus communications with built-in event setup. Optional Opto-22 panel and communications
- Compatible with Guided Wave's proven probe and flow cell products
- Fully insulated NEMA 4 or NEMA 4X enclosure with built in Internal Thermal Control
- Full spectrum scanning, 235 nm to 850 nm
- Multi-channel design from 1 to 4 channels
- Individual pulsed Xenon source on each channel
- Unscrambler® Calibration Model Ready (with option Unscrambler® Predictor)
- GW ASCII and Binary and SPC File Formats

Guided Wave Incorporated

3033 Gold Canal Drive
Rancho Cordova, CA 95670
Tel: 916-638-4944
Fax: 916-635-8458
gwinfo@guided-wave.com

www.guided-wave.com

Literature: #1023-06-11

Guided Wave BV

PO Box 427
7550 AK Hengelo (o)
The Netherlands
Tel: +31-74-2595390
Fax: +31-74-2595752
info@guided-wave-europe.com

Specifications

Wavelength Range	235 nm – 850 nm
Wavelength Accuracy	±0.1 nm
Photometric Noise	0.001 @ 0 AU, 550 nm
Stray Light	< 0.1 % @ 220 nm
Number of Pixels	1024
Bandwidth	< 3 nm
Dynamic Range	2000:1 for a single scan
Fiber Optic Connections	SMA 905
Instrument Control Unit (ICU) (General Purpose enclosure only)	Pentium 850 MHz w/250MB RAM, CD-ROM, Floppy, 18 GB Hard drive, 12.1" 800x600 AMTFT Color Display, Ethernet, and 2-USB, 3-RS232, 1-PCI Slot, 1-PSI/ISA Slot, 1-Parallel Port, and 1-RS232/485 Ports
Operating System	Windows XP®
Temperature Range	0 °C to 40 °C
Internal Thermal Control	±0.5 °C between 30 °C and 40 °C
Humidity	10% to 90% RH, non-condensing
Power	110/220 Vac 50/60 Hz, 1500 W
Dimensions (w x d x h)	24"x 17.7" x 29.3" [61 cm x 44.9 cm x 73.4 cm] -OR- 30"x 17.7" x 41.3" [76 cm x 44.9 cm x 105 cm]
Weight	200 lbs [91 kg]

Options

- Class 1 Div 2 Groups C & D, Z-Purge
- Class 1 Div 1 Groups B & C, X-Purge
- ATEX Certified Purge
- SNAP I/O analog and discrete communications package by Opto-22

Coming Soon Built-in Color Analysis

Specifications are subject to change without notice.

Applications

- Solvent recovery purity
- Maleic acid in tetrahydrofuran (THF)
- Tert-butyl catechol (TBC) polymerization inhibitor in butadiene
- Trace (ppm level) impurities in wash water; Clean-In-Place for Pharma
- Polynuclear aromatics (PNA's) in middle distillates
- Phenol in cyclohexanone
- Sodium hypochlorite in bleach solutions
- Aromatics in monomers Benzene in cyclohexane
- Saybolt or ASTM color of diesel and jet fuels
- Toluene diisocyanate in polyurethane
- UV inhibitors in polymers
- Antioxidants in polymers and plastics
- Color and clarity of varnishes

Guided Wave Incorporated
 3033 Gold Canal Drive
 Rancho Cordova, CA 95670
 Tel: 916-638-4944
 Fax: 916-635-8458
 gwinfo@guided-wave.com

www.guided-wave.com

Literature: #1023-06-11

Guided Wave BV
 PO Box 427
 7550 AK Hengelo (o)
 The Netherlands
 Tel: +31-74-2595390
 Fax: +31-74-2595752
 info@guided-wave-europe.com